


FCR Color Printer
Microjet Recorder Series



A Revolution in Recorder Technology

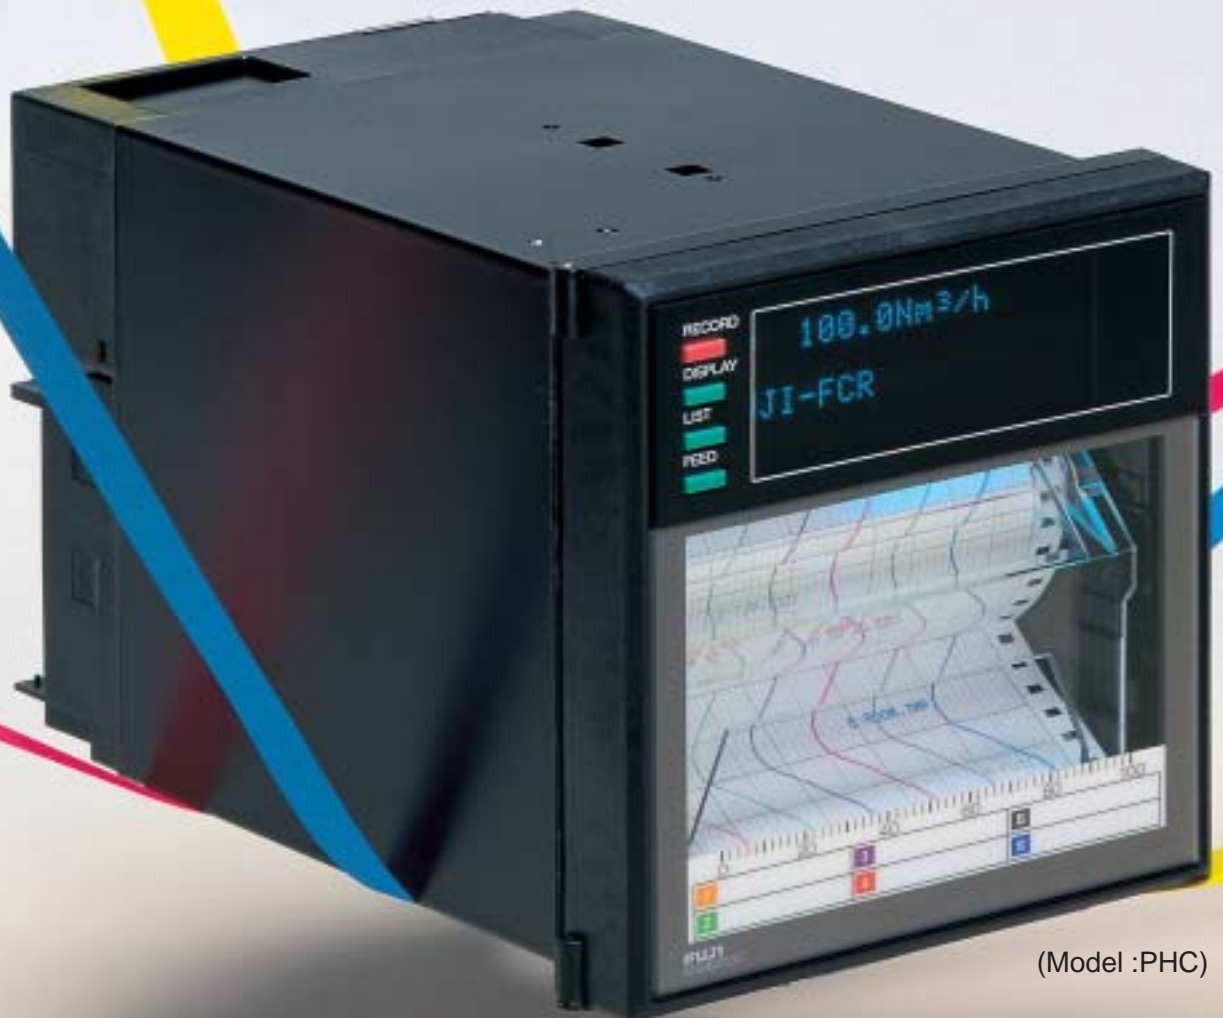

(Model :PHC)

The microjet recorder is a revolutionary recorder, its ink jet color printer technology is adopted in industrial type recorders for the first time in the world.

Fuji established ink jet technology based on the unique silicon chip manufacturing process for FCX transmitters.



The ink jet printing mechanism provides twelve continuous traces with a 180mm width recorder and six continuous trace with a 100mm width recorder without pen offset. The mechanism also provides six sharply defined colors.

Microjet recorder was designed with a reduced number of complicated mechanical parts to make it as trouble-free as possible.

Ink Jet Technology



The ink jet head is formed on a stable quality silicon chip. The ink jet head printing mechanism does not touch the chart paper, allowing reliable recording.

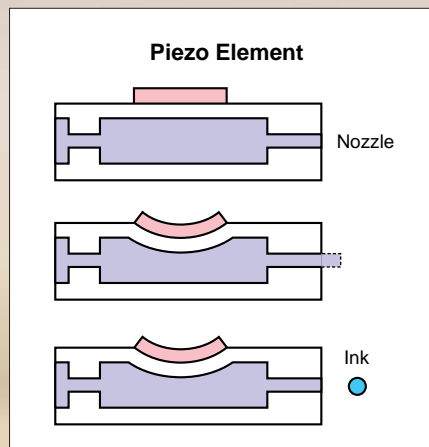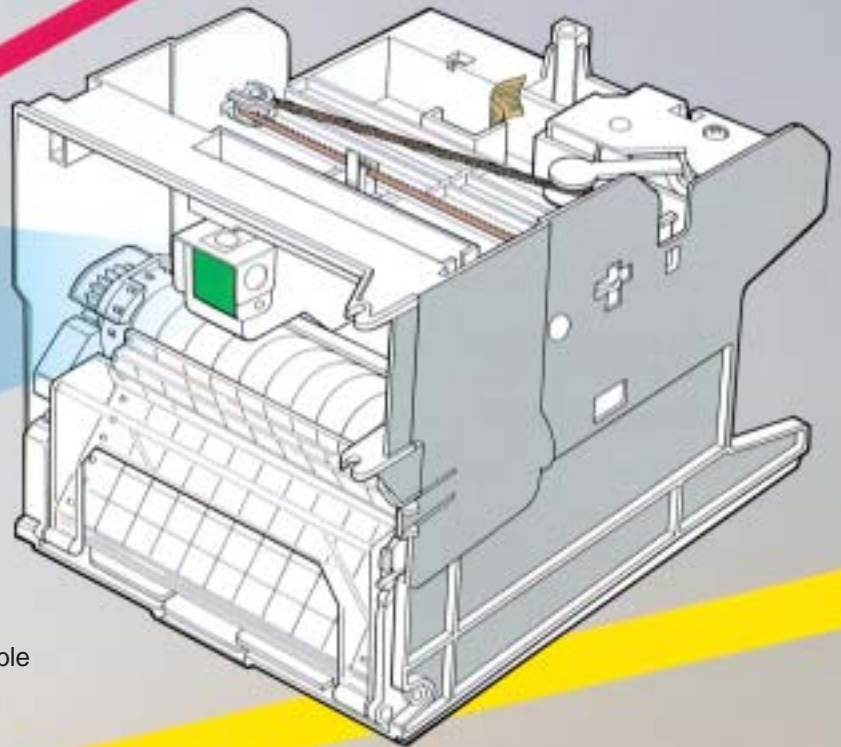



The ink jet mechanism is formed on a thin silicon chip (17.6 x 16mm) using silicon micro machining technology. It is provided with piezo elements. With voltage applied to the piezo elements, the shape of the elements changes as shown in the diagram, and ink particles are ejected from the tip of the nozzle. These particles are very small and fast, and draw a series of very small dots of about 0.3mm diameter on the chart paper. These small dots are combined together to form characters and trace lines for clear visible recording.

6 Color High Quality Trace


Instantaneous value
Chart speed
Time
Time line

Tag No./Tag name

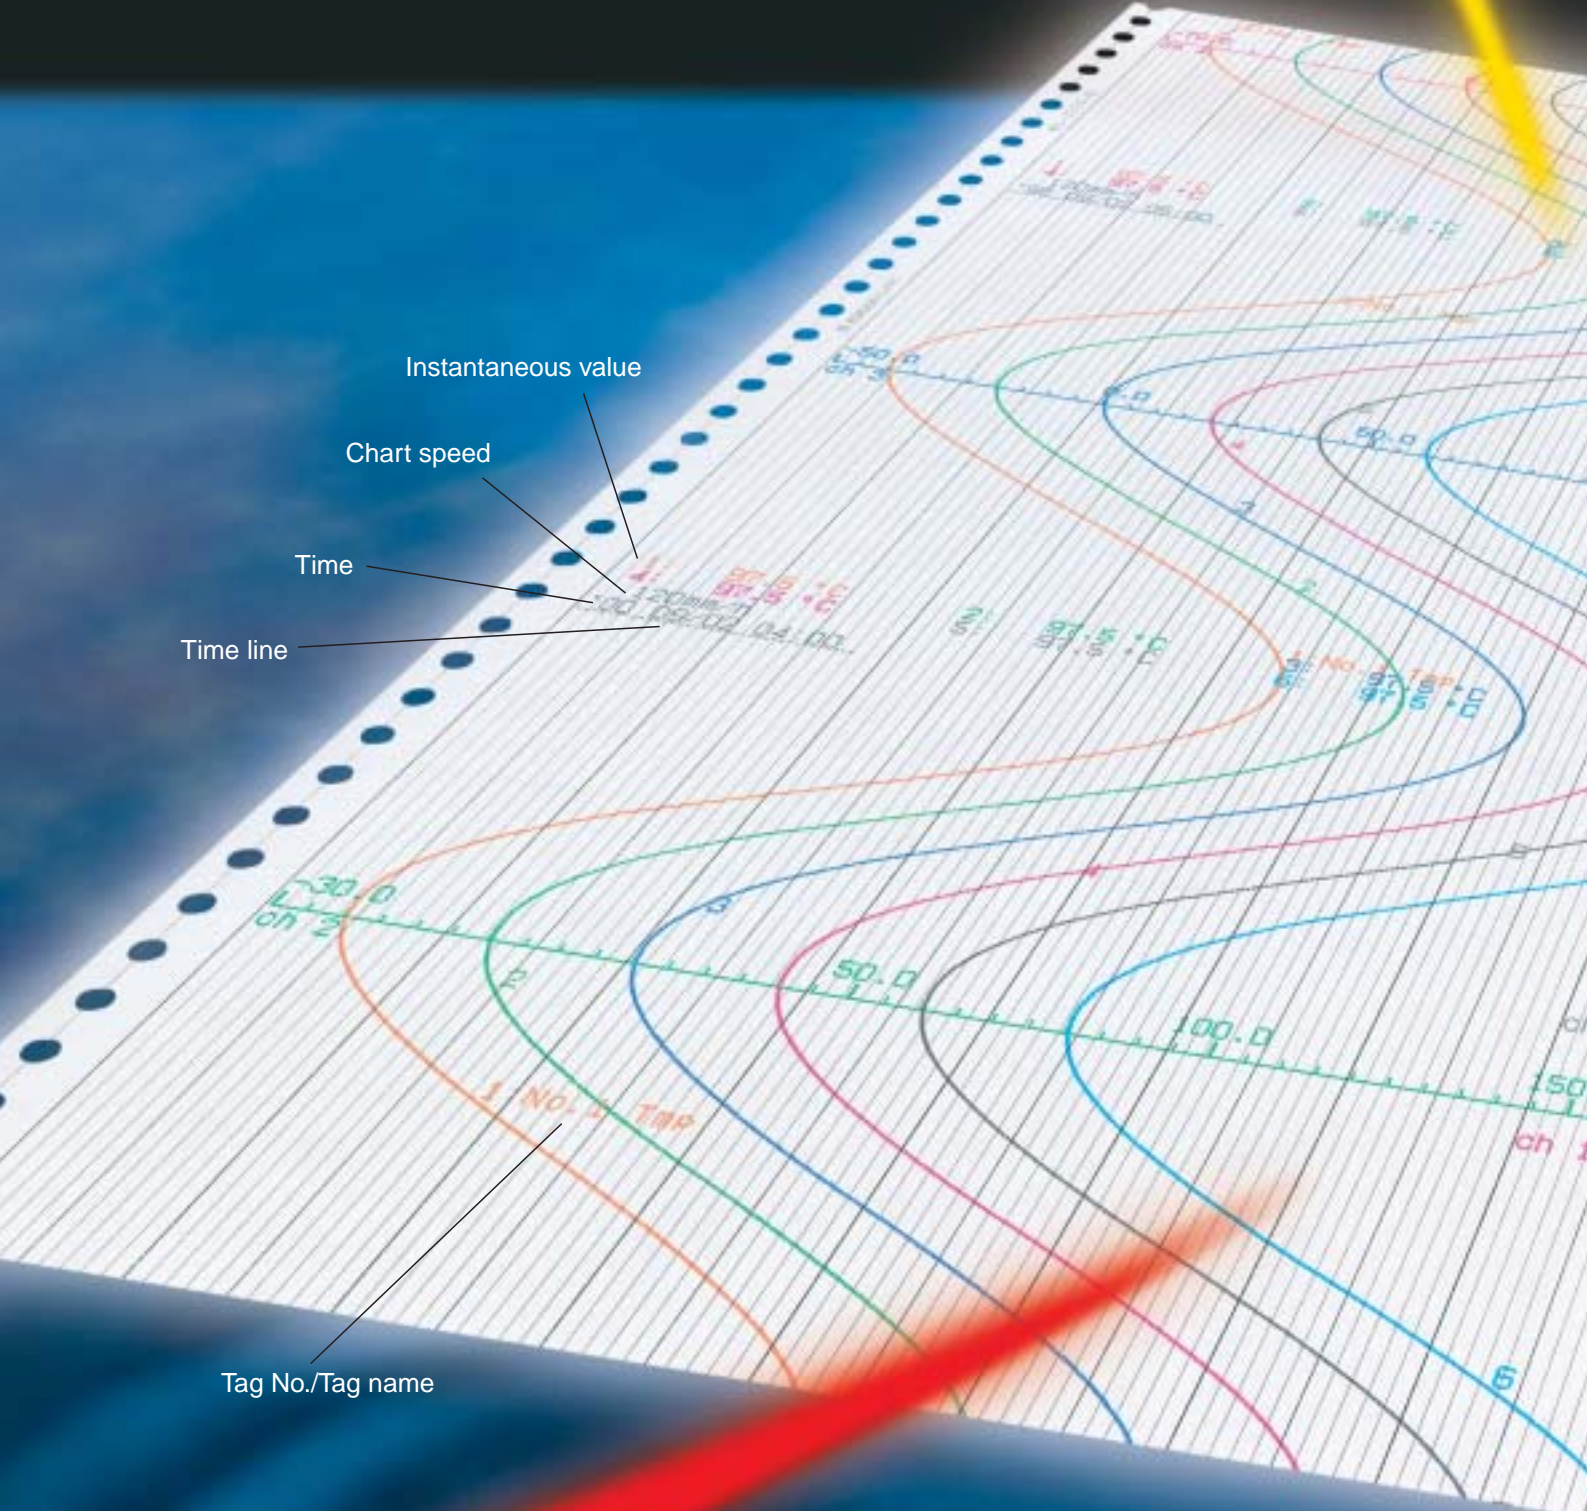

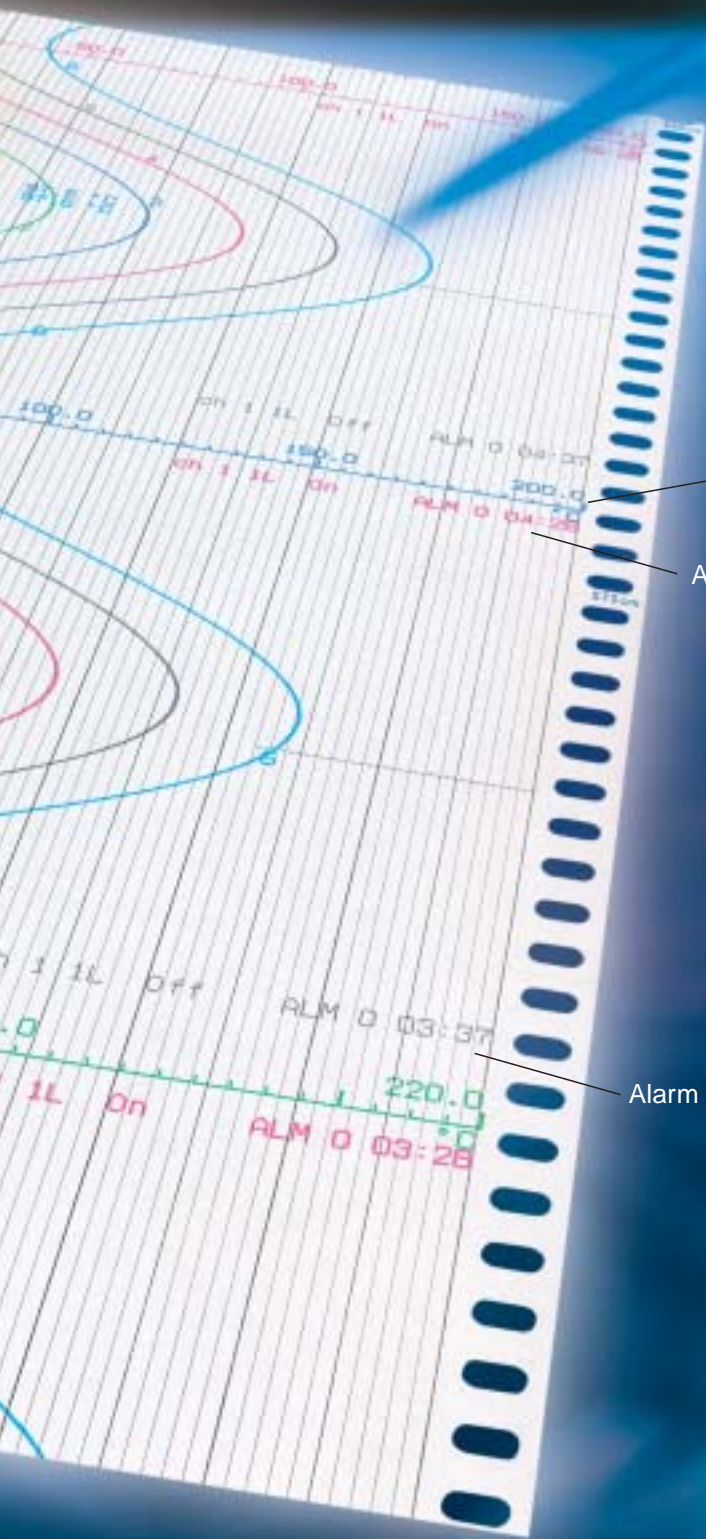

Microjet

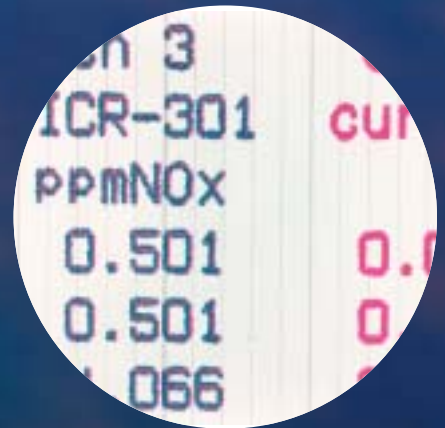

The ink jet printing mechanism allows continuous recording for a maximum of 12 channels (6 channels with 100mm width recorder) in 6 different colors. An A/D converter is used for each input signal for high speed data sampling to obtain a trace similar to that obtained by conventional pen mechanism recorders. Digital printing is also possible in the same color as the channel color, so clear and visible recording can be obtained. (for model PHA, PHC)

Microjet Recorder PHC/PHA



(PHC)



(PHA)


Report Generation



Daily report/totalization


On a daily report, measured values for every hour are printed along with maximum, minimum and average values.

On a totalization, integrated values at intervals of 1 hour and the total value for one day are printed.

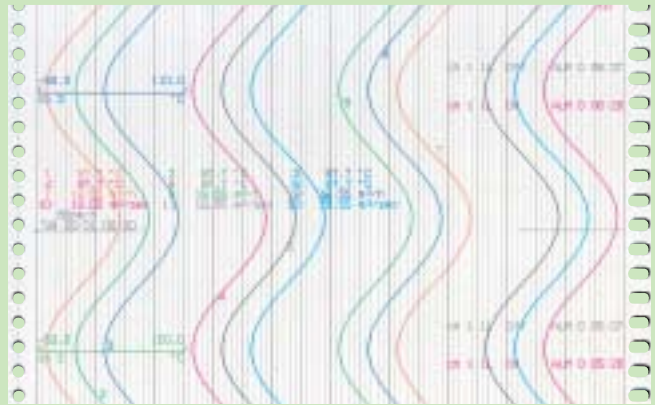

Zoom, zone, auto-range trace

Special traces that match the operating conditions of the plant are available.

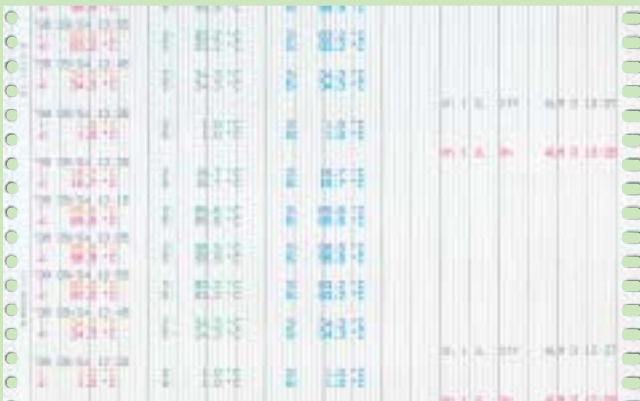

Logging print

Printing of measured values at intervals of 10-60 minutes.

Note: Analog trace is not available for logging printing.



Parameter list, test pattern

Configuration data can be checked with parameter list.

A test pattern of all colors and all combinations of colors is available.

Continuous recording

- 6 colors
- 180mm width, 12 channels
- 100mm width, 6 channels

Digital data printing in channel color

Self-printing scale in channel color

Tag No./Name printing in channel color, 8 digits (Max)

Message printing in 6 color

Long life recording

6 months continuous operation with one cartridge.

Color on each channel is selectable

The following status printing is available for analyzing recording results.

- Alarm
Red at alarm ON, black at alarm OFF, Channel No. and time are printed
- Burnout
- Ink shortage
- Recording start mark
- Chart speed change mark

High reliability recording

- 6 colors continuous trace

- Ink is not soluble in water, excellent water/sunlight resisting characteristics.

Compact and light-weight design

- Mass (weight): 2.1kg/100mm width
- 6.0kg/180mm width

Simple choice

- Depth: 199mm
- The 100 and 180mm width recorders are configurable on each channel and accept most industrial inputs.
- The recorder operates on AC power 100 to 240V.

RS-485 Communications

Simple Operation

4-key operation (with door closed)

German and French languages can be displayed.



(PHC)


- A. Record start/stop key
- B. Display select key
- C. Measured value print key
- D. Chart feed key



(PHA)

4-key configuration (with door open)

Configuration can be done according to operation guide

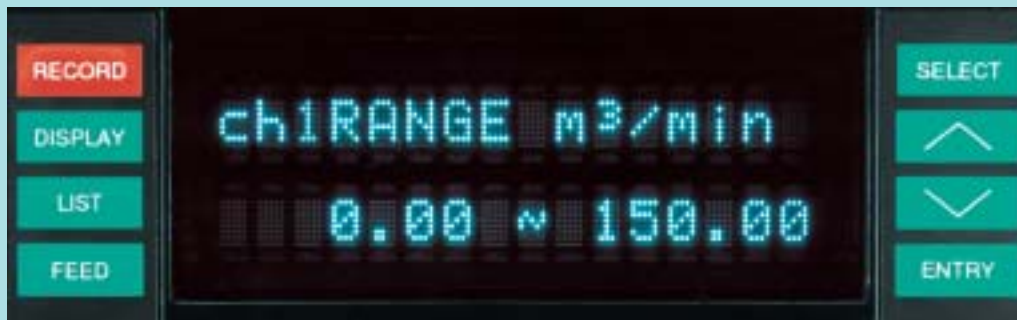

(PHC)

- E. Select key
- F. Up key
- G. Down key
- H. Data entry key



(PHA)

Simple Design

Simple Design

The ink jet mechanism is simple in design.

Electronic parts are increasingly used in the recorder.

Mechanical parts have been reduced to about 1/3 that of conventional recorders and it comprises about 2/3 of the total number of parts.

The small size (199mm deep) contributes to panel cost saving.

Fully Configurable input

This recorder accepts multiple inputs.

With a process input, it can record and print the results of filter, square-root extraction, subtraction calculation and scaling for each channel.



Reduced Maintenance

Complicated servo mechanism is not used.

Each input has its own input circuit.

Unlike conventional recorders, input scanning relays are not used and hence trouble-free operation is ensured.

Specification Summary

| | | | |
|------------------------------|------------------------------|--|---|
| | |  |  |
| Model | | PHC | PHA |
| Chart width/length | | 100mm/15m | 180mm/20m |
| No. of input channel | | 3/6 | 6/12 |
| Input Signal type | | TC (J, K, E, R, B, S, T, L, U, W, PN, N), RTD, DC V (± 50mV, ± 500mV, ± 5V, ± 50V DC), DC mA | |
| Measuring cycle | | 160/320ms. | 320ms. |
| Accuracy | Display Accuracy | ± 0.15% of measuring range, ± 1 digit without cold junction compensation error | |
| | Analog Trace Accuracy | Display accuracy ± 0.25% of measuring range | |
| Display | | Fluorescent (20 characters x 2 lines) | |
| Chart speed | | 5-400mm/h continuous trace 401-1500mm/h intermittent trace | 5-300mm/h continuous trace 301-1500mm/h intermittent trace |
| Recording cycle | | Recording cycle (sec.) = $\frac{400}{\text{Chart speed (mm/h)}}$ Recording cycle is more than 2 seconds. | Recording cycle (sec.) = $\frac{450}{\text{Chart speed (mm/h)}}$ Recording cycle is more than 3 seconds. |
| Calculation * | | Square root extraction, Subtraction, Scaling, Input filter, Logarithm | |
| Report Generation | | Daily report, Totalize list, Parameter list, Test pattern, Measured value list, Logging print, Message print | |
| Alarm | | H, L, RH, RL for each input, Burnout, Ink-out, Chart end, Battery alarm | |
| Option | Alarm output | 6 Relay output | 6/12 Relay output |
| | Remote control | Record start/stop, Chart speed change, Measured value print, Message print | |
| | Communication | RS-485 | RS485, T-Link |
| | Chart Illumination | Cold cathode fluorescent | |
| Power supply | | 100-120V AC or 200-240V AC (Usable Range 85-150VAC or 150-300VAC) | 100-240V AC (Usable Range 85-300VAC) |
| Environmental | | Temperature: 0 to 50°C Humidity: 20 to 80%RH (Temp. (°C) x Humi. (%RH) < 3200) | IEC IP50 |
| Mass {weight} Approx. | | 2.1kg (without options) | 6kg (without options) |

* Consult Fuji Electric Instruments for additional features not listed such as flow integration record and calculation of input signal, etc.

Code Symbols

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | - | 9 | 10 | 11 | 12 | 13 | |
|--------------------------------------|---|---|---|---|---|---|---|---|---|----|----|--|----|--------------------------|
| P | H | C | | | 0 | 0 | 3 | - | | | | | V | |
| Description | | | | | | | | | | | | | | |
| Recording points | | | | | | | | | | | | | | |
| | | | 3 | 3 | | | | | | | | | | 3 continuous recording |
| | | | 6 | 6 | | | | | | | | | | 6 continuous recording |
| | | | 7 | 6 | | | | | | | | | | 6 intermittent recording |
| Power Supply | | | | | | | | | | | | | | |
| | | | | | A | | | | | | | 100 to 120V AC 50/60Hz | | |
| | | | | | E | | | | | | | 200 to 240V AC 50/60Hz | | |
| Chart paper illumination | | | | | | | | | | | | | | |
| | | | | | A | | | | | | | Without | | |
| | | | | | B | | | | | | | With | | |
| Alarm output/external control | | | | | | | | | | | | | | |
| | | | | | 0 | | | | | | | Without | | |
| | | | | | 1 | | | | | | | 6-point alarm output (N.O.)/ 3-point external control | | |
| | | | | | 2 | | | | | | | 6-point alarm output (N.C.)/ 3-point external control | | |
| Transmission function | | | | | | | | | | | | | | |
| | | | | | Y | | | | | | | Without | | |
| | | | | | R | | | | | | | With RS-485 | | |


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | - | 9 | 10 | 11 | 12 | 13 |
|--------------------------------------|---|---|---|---|---|---|---|---|---|----|----|---|----|
| P | H | A | | | 0 | 0 | 4 | - | E | | | | V |
| Description | | | | | | | | | | | | | |
| Recording points | | | | | | | | | | | | | |
| | | | | | 6 | | | | | | | 6 continuous recording | |
| | | | | | 7 | | | | | | | 6 intermittent recording | |
| | | | | | 8 | | | | | | | 12 intermittent recording | |
| | | | | | 9 | | | | | | | 12 continuous recording | |
| Chart paper illumination | | | | | | | | | | | | | |
| | | | | | A | | | | | | | Without | |
| | | | | | B | | | | | | | With | |
| Alarm output/external control | | | | | | | | | | | | | |
| | | | | | 0 | | | | | | | Without | |
| | | | | | 1 | | | | | | | 6-point alarm output/3-point external control | |
| | | | | | 2 | | | | | | | 12-point alarm output/3-point external control | |
| Transmission function | | | | | | | | | | | | | |
| | | | | | Y | | | | | | | Without | |
| | | | | | R | | | | | | | With RS-485 | |
| | | | | | T | | | | | | | With T-Link | |

Note) 1. Input signal


Setting prior to delivery is as follows;

- Thermocouple K: 0 to 1200°C
2. Shunt resistor (10 ± 0.1%) should be ordered separately for current input.
Shunt resistor : Ordering code PHZT8101 for PHA, PHZT1101 for PHC
 3. T-Link transmission function is Fuji's original PLC Link transmission function

Dimension of PHC (100mm width)

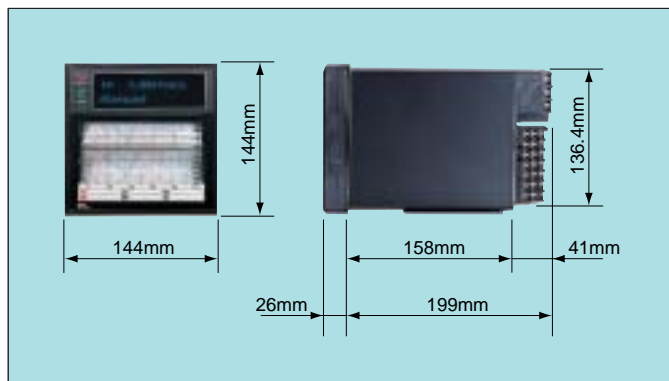

Dimension of PHA (180mm width)

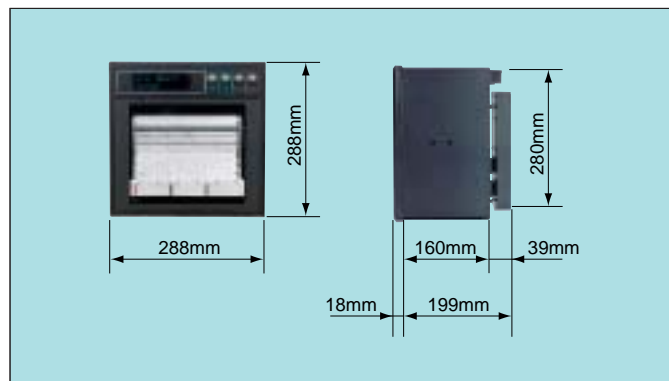

Microjet Recorder-E

PHE



Inkjet technology, previously available only on expensive printers, is now available on a strip chart recorder at an affordable price, a price that falls below the cost of some dot matrix type printers. If you note the comparison between the dot matrix and inkjet typeface, there simply is no reason to use a dot matrix type recorder anymore.

- This recorder has basically 2 models, user programmable model and factory configuration model.
- Factory can pre-configure recorder parameters with customer supplied information prior to shipment, reducing the users' total installation cost and time.
- In case of 1 or 2 continuous recording, 2-color type Ink cartridge (PHZH2002) is also available. Since its life-span became longer than before, you can cut the running-cost in 1/4-1/2.
- Real time clock (calendar) function is available with standard specification.

Specification Summary

| Model | | PHE1 | PHE2 | PHE7, 8, 9 |
|-----------------------|---------------------------------|---|------------------------|--|
| Chart width/length | | 100mm/15m | | |
| No. of input channel | | 1 | 2 | 6 |
| Signal type | | TC (J, K, E, R, B, S, T, L, U, W, PN, N), RTD, DC V (± 50mV, ± 500mV, ± 5V, ± 50V DC), DC mA | | |
| Input/Recording range | | User programmable or factory configuration | | |
| Measuring cycle | | 200ms/point | | 30s/all point with input scanning relay |
| Accuracy | Display Accuracy | (± 0.3% + 1 digit) of measuring range (DC voltage, DC current input) | | |
| | Analog trace Accuracy | Display accuracy ± 0.2% of measuring range | | |
| Display | | LED (7 segments x 6 digits) | | |
| Chart speed | | 10/20/24/30/50/120/200/300/400 mm/h | | 10/20/24/30/50/120/200/300/400/1000/1200/1500 mm/h |
| Recording cycle | | $\text{Recording cycle (sec.)} = \frac{400}{\text{Chart speed (mm/h)}}$ Recording cycle is more than 2 seconds. | | 30s/all point |
| Printing function | During analog recording | Channel No., Periodic data, Scale, Alarm, Burnout, Date and Time | | |
| | Independent of analog recording | Instantaneous value list, Parameter list, Scale list, Test Pattern | | |
| | Other | Recording start mark, Chart speed change mark | | |
| Alarm | | L/LL, H/L, H/HH | | |
| Option | Alarm output | 2 relay output | 4 relay output | 6 relay output |
| | Remote control | Chart speed change | | |
| Power supply | | 100-120V AC or 200-240V AC | | |
| Environmental | | Temperature: 0 to 50°C IEC IP50 Humidity: 20 to 80%RH (Temp. (°C) x Humi. (%RH) < 3200) | | |
| Mass {weight} Approx. | | 1.2kg (without option) | 1.2kg (without option) | 1.5kg (without option) |

Code Symbols

User programmable model

| 1 2 3 4 5 6 7 8 - 9 10 11 12 13 | | | | | | | | | | | | |
|---------------------------------|---|---|---|---|---|---|---|---|---|---|-------------|--|
| P | H | E | 0 | 0 | 2 | - | V | V | E | V | Description | |
| 1 | | | | | | | | | | | | Recording points |
| 2 | | | | | | | | | | | | 1 continuous recording |
| 9 | | | | | | | | | | | | 2 continuous recording |
| | | | | | | | | | | | | 6 intermittent recording |
| 1 | | | | | | | | | | | | Power Supply · Temperature Unit |
| 2 | | | | | | | | | | | | 100 to 120V AC 50/60Hz °C |
| 3 | | | | | | | | | | | | 200 to 240V AC 50/60Hz °C |
| 4 | | | | | | | | | | | | 100 to 120V AC 50/60Hz °F |
| | | | | | | | | | | | | 200 to 240V AC 50/60Hz °F |
| 0 | | | | | | | | | | | | Alarm output/external control input (1 point) |
| 1 | | | | | | | | | | | | Without |
| 2 | | | | | | | | | | | | 2 points alarm output (1 continuous only) |
| 3 | | | | | | | | | | | | 4 points alarm output (2 continuous only) |
| A | | | | | | | | | | | | 6 points alarm output (6 intermittent only) |
| B | | | | | | | | | | | | 2 points alarm output/External control (1 continuous only) |
| C | | | | | | | | | | | | 4 points alarm output/External control (2 continuous only) |
| | | | | | | | | | | | | 6 points alarm output/External control (6 intermittent only) |

Input : Universal (Programmable)
Range : Field settable (Programmable)


Note) 1. Input signal
Setting prior to delivery is as follows;
• Thermocouple K: 0 to 1200°C
2. Shunt resistor (10 ± 0.1%) should be ordered separately for current input.
Shunt resistor : Ordering code PHZT 1101

Factory configuration model

| 1 2 3 4 5 6 7 8 - 9 10 11 12 13 | | | | | | | | | | | | |
|---------------------------------|---|---|--|--|---|---|--|--|--|--|--|--|
| P | H | E | | | 2 | - | | | | | | Description |
| 1 | | | | | | | | | | | | Recording points |
| 2 | | | | | | | | | | | | 1 continuous recording |
| 7 | | | | | | | | | | | | 2 continuous recording |
| 8 | | | | | | | | | | | | 6 intermittent recording (single scale) |
| | | | | | | | | | | | | 6 intermittent recording (double scale) |
| | | | | | | | | | | | | Input signal |
| | | | | | | | | | | | | 1 continuous * Y |
| | | | | | | | | | | | | 2 continuous ** |
| | | | | | | | | | | | | 6 intermittent (single range) * Y |
| | | | | | | | | | | | | 6 intermittent (double range) ** |
| | | | | | | | | | | | | Symbols of input signals |
| | | | | | | | | | | | | X..... B thermocouple R..... R thermocouple |
| | | | | | | | | | | | | S..... S thermocouple K..... K thermocouple |
| | | | | | | | | | | | | E..... E thermocouple J..... J thermocouple |
| | | | | | | | | | | | | T..... T thermocouple N..... N thermocouple |
| | | | | | | | | | | | | W..... W thermocouple L..... L thermocouple |
| | | | | | | | | | | | | U..... U thermocouple P..... PN thermocouple |
| | | | | | | | | | | | | H..... Pt100 |
| | | | | | | | | | | | | A..... 1 to 5V DC B..... 4 to 20mA DC *1 |
| | | | | | | | | | | | | C..... 10 to 50mA DC *1 M..... ± 50mV DC |
| | | | | | | | | | | | | O..... ± 500mV DC V..... ± 5V DC |
| | | | | | | | | | | | | F..... ± 50V DC |
| 1 | | | | | | | | | | | | Power supply · Temperature Unit |
| 2 | | | | | | | | | | | | 100 to 120VAC 50/60Hz C |
| 3 | | | | | | | | | | | | 200 to 240VAC 50/60Hz C |
| 4 | | | | | | | | | | | | 100 to 120VAC 50/60Hz F |
| | | | | | | | | | | | | 200 to 240VAC 50/60Hz F |
| | | | | | | | | | | | | measuring range |
| | | | | | | | | | | | | 1 continuous * Y |
| | | | | | | | | | | | | 2 continuous ** |
| | | | | | | | | | | | | 6 intermittent (single scale) * Y |
| | | | | | | | | | | | | 6 intermittent (double scale) ** |
| | | | | | | | | | | | | measuring range code are specified for each input signal. |
| 0 | | | | | | | | | | | | Alarm output/external control input (1 point) |
| 1 | | | | | | | | | | | | Without |
| 2 | | | | | | | | | | | | 2 points alarm output (1 continuous only) |
| 3 | | | | | | | | | | | | 4 points alarm output (2 continuous only) |
| A | | | | | | | | | | | | 6 points alarm output (6-intermittent only) |
| B | | | | | | | | | | | | 2 points alarm output/External control (1 continuous only) |
| C | | | | | | | | | | | | 4 points alarm output/External control (2 continuous only) |
| | | | | | | | | | | | | 6 points alarm output/External control (6 intermittent only) |
| | | | | | | | | | | | | Instruction manual |
| | | | | | | | | | | | | Not attached |
| | | | | | | | | | | | | English |

Note) Recorder will be shipped with 10 shunt resistor attached to terminal for current input. For intermittent double scale type, 2 kind of recording range and unit should be specified. One is for channel 1 to channel 3, the other is for channel 4 to channel 6.

Outline diagrams

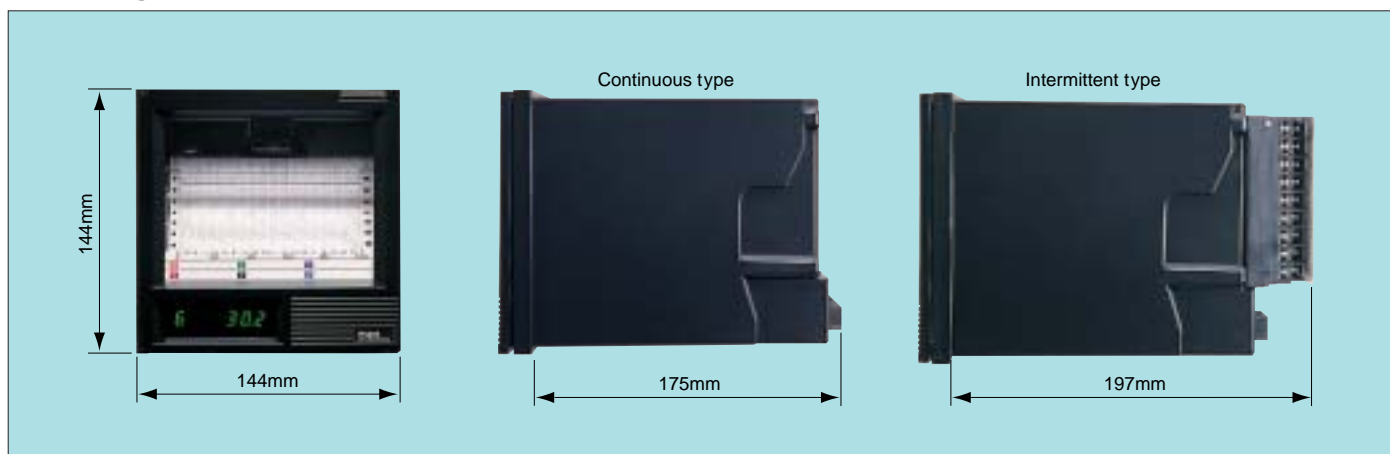

Fuji Electric Co.,Ltd.

Head office

11-2 Osaki 1-chome, Sinagawa-ku, Tokyo,141-0032 Japan
<http://www.fujielectric.co.jp/eng>

Fuji Electric Instruments Co.,Ltd.

Sales Div.

International Sales Dept.

No.1 , Fuji-machi, Hino-city, Tokyo,191-8502 Japan
Phone : 81-42-585-6201,6202
Fax : 81-42-585-6187
<http://www.fic-net.co.jp/eng>