




Search Fluke



Home ▶ Products ▶ Electrical tools ▶ **Clamp meters**

# Fluke 362 Clamp Meter

★★★★★ 5.0 (1) [Write a review](#)

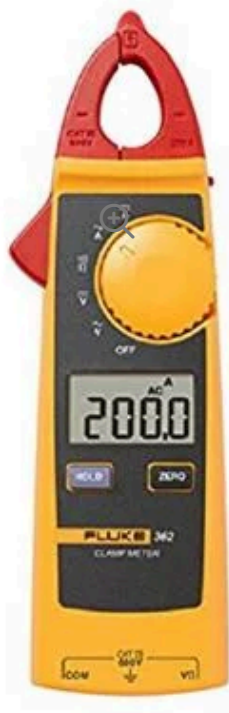

Buy now

## Key features

- Thin, light, compact body design for one-hand operation
- 18mm triangular jaw allows for easy measurement on small cables
- Large, easy-to-read backlit display
- 200 A ac and dc current and 600 V ac and dc voltage measurement range
- 3000  $\Omega$  resistance range, continuity detection
- Zero function allows the display to be cleared for DC measurements
- Data Hold function

[↗ Read less](#)

[↓ Download the product manual](#)

Product overview

Specifications

Reviews + Q&A

Manuals + resources

## Specifications: Fluke 362 Clamp Meter

	Range	Resolution	Accuracy
AC current	200A	0.1A	2% $\pm$ 5 digits (45-65Hz) 2.5% $\pm$ 5 digits (65-400Hz)
DC current	200A	0.1A	2% $\pm$ 5 digits
AC voltage	600 V	0.1 V	1.5% $\pm$ 5 digits (45-400Hz)
DC voltage	600 V	0.1 V	1% $\pm$ 5 digits
Resistance	300/3000 $\Omega$	0.1/1 $\Omega$	1% $\pm$ 5 digits
Continuity	$\leq 70\Omega$		

### General Specifications

Size (LxWxH) mm	205 × 60 × 22
-----------------	---------------

Clamp opening	18 mm
Weight	196 g
Safety rating	CAT III 600 V
Warranty	2 years

## About Fluke

[About us](#)

[Careers](#)

[Press](#)

[Supplier handbook](#)

## Contact us

[Contact us](#)

[Repair](#)

[Technical support](#)

## Manuals + resources

[Promotions](#)

[Manuals](#)

[Product registration](#)

[Safety notices](#)

[Where to buy](#)

[Test tools catalog](#)



**Fluke.** *Keeping your world up and running.*<sup>®</sup>

[Privacy policy](#)

[Fluke terms of use](#)

[Fluke terms and conditions of sale](#)

[Fluke terms and conditions of service](#)

[Site map](#)

©1995 - 2024 Fluke Corporation