
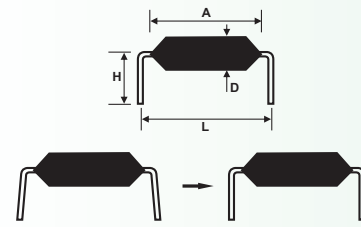


Model: EC 101
Automatic IC Forming Machine

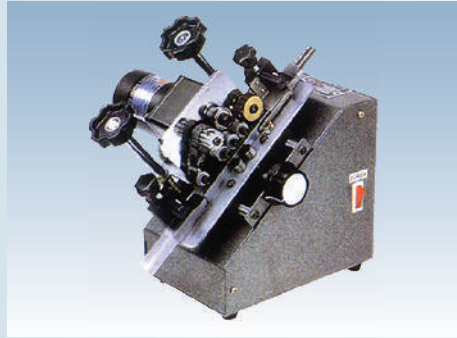


A	6-18 mm
B	4-9.5 mm
D	3-12 mm
L	0.3"-0.6"

SPECIFICATIONS :


Output	30 second / standard IC Tube
Power	220V AC, 50 Hz
Dimensions	L-1250 W-200 H-200 mm
Weight	12 Kg

IC Lead Straightener

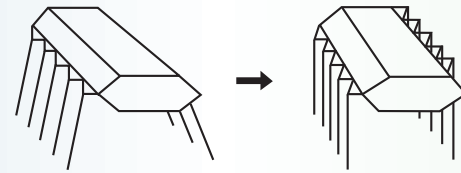

Model	
EC 31	0.30" (07.62 mm)
EC 32	0.40" (10.06 mm)
EC 33	0.60" (15.24 mm)
EC 34	0.75" (19.05 mm)

Model: UMP 870
Universal Manual Pre-former

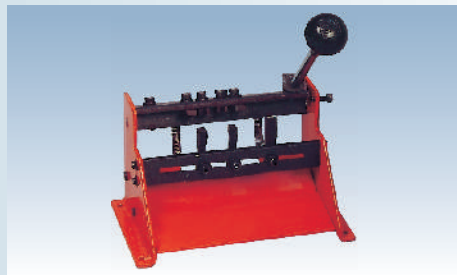

FEATURES :

- Manual Operation
- Versatile machine with variety of tool option
- Suitable for loose axial and radial components
- Easy adjustments
- Hardened steel tooling
- Ideal for low to medium volume production

SPECIFICATIONS :

Dimensions	L-165 W-105 H-100 mm
Weight	1.2 Kg

Vibratory Bowl Feeder



FEATURES :

- Tailor made bowl feeders to suit different components
- Compatible with Loose Radial Cutter Model ARP 360

Estovir Technologies

Regd. Office: 205, C-3, Puja House, Karampura Commercial Complex, New Delhi-110015
Works: Plot No 375, Sector 7, IMT Manesar, Gurgaon-122050

Tel: +91-124-4013575, 4013576, 4013577 • Email: eepl@bol.net.in, estovir@dataone.in • URL : www.estovir.in

ESTOVIR TECHNOLOGIES


We are available at :

Delhi, Chandigarh, Bangalore, Pune

Specification subject to change without notice




Model : UAP 101M/ 101F
Automatic Cut, Bend & Kink Machine for Taped Axials

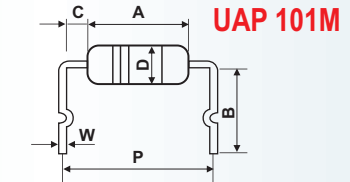

A	3.5 - 20
B	Adjustable
C	1.2 min
D	Ø 3.0 - Ø 8.0
E	Fixed 8.0
W	Ø 0.5 - Ø 0.9
P	A+2C+W



SPECIFICATIONS :

Output	110pcs/min
Power	220V AC, 50 Hz
Dimensions	L-1050, W-600, H-650 mm
Weight	115 Kg



A	3.5 - 20
B	3.0 min
C	1.2 min
D	Ø 3.0 - Ø 8.0
W	Ø 0.5 - Ø 0.9
P	5.0

Model : UAP 850
Automatic Cut & Bend Machine for Taped Axials


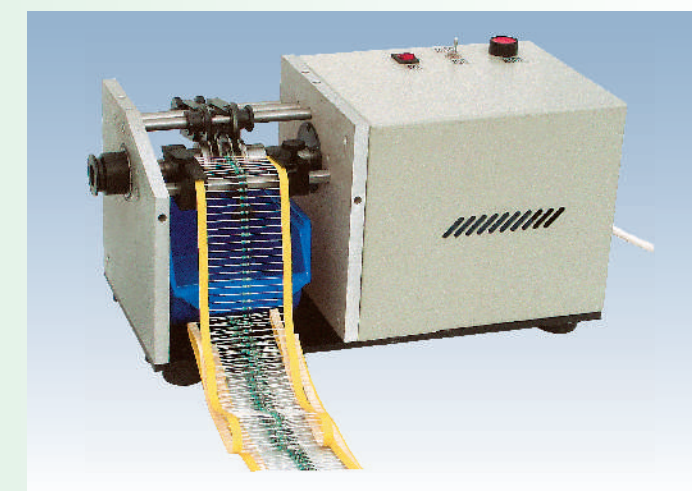


A	3.5 - 20
B	3.0 - 20.0
C	1.3/1.0 min
D	Ø 3.0 - Ø 10.0
W	Ø 0.5 - Ø 0.8
P	A+2C+W

SPECIFICATIONS :

Output	14000 pcs/hr
Power	220V AC, 50 Hz
Dimensions	L-330, W-160, H-155 mm
Weight	10 Kg

Model : MAP 860
Manual Cut & Bend Machine for Taped Axials


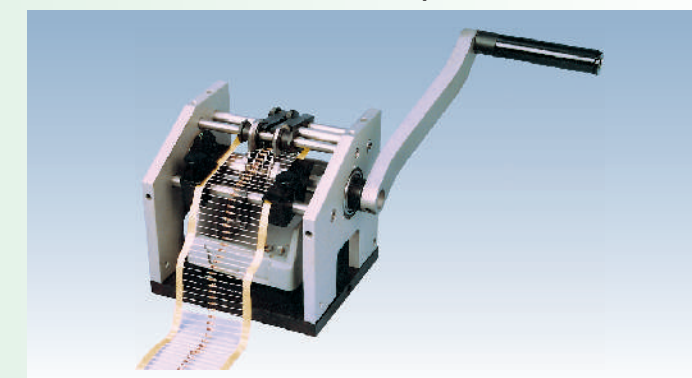


A	3.5 - 12
B	3.0 - 20.0
C	1.3/1.0 min
D	Ø 3.0 - Ø 10.0
W	Ø 0.5 - Ø 0.8
P	A+2C+W

SPECIFICATIONS :

Output	10000-18000 pcs/hr
Dimensions	L-330, W-160, H-155 mm
Weight	3 Kg

Model: MAP 301 H/V
Manual Forming for Taped Axials (Horizontal/Vertical)

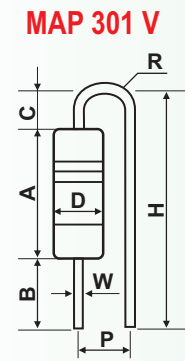


SPECIFICATIONS :

Output	10000-18000 pcs/hr
Dimensions	L-250 W-250 H-200 mm
Weight	5 Kg

	H	V
A	3.5-40	4-18
B	3.6-15	2.5-10
C	1.2 min	3 min
D	1.5-8	1.5-8
W	0.35-1	0.35-1
P	A+2C	2.5-13.5
H		A+B+C

Motor Drive Unit for Manual Forming Machine

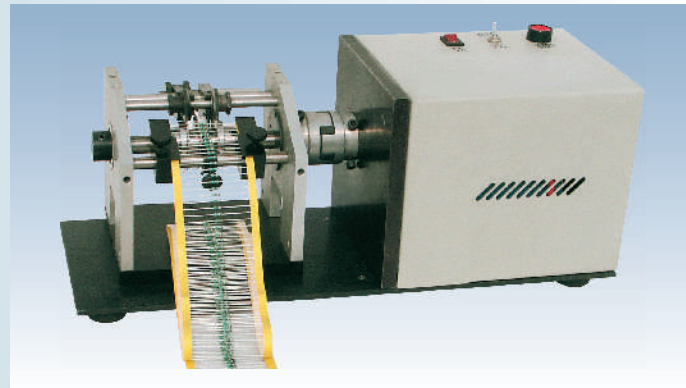

SPECIFICATIONS :

Output	14000 pcs/hr
Power	220V AC, 50 Hz
Dimensions	L-450, W-160, H-155 mm
Weight	12 Kg

Model: JMP 681
Automatic Jumper Forming Machine





L	2.5 / 5-35
h	1 - 12
H	3, 5, 8 mm
W	Ø 0.6 - Ø 0.7 mm

SPECIFICATIONS :

Output	7500 pcs/hr
Power	220V AC, 50 Hz
Dimensions	L-320, W-300, H-450 mm
Weight	37 Kg

Model: JMP 681
Automatic Jumper Forming Machine

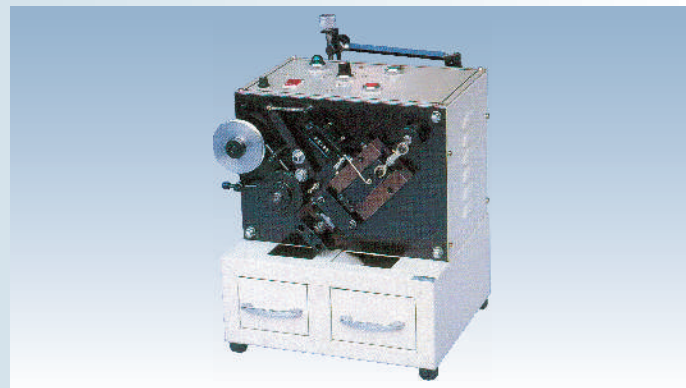


L	5-40
H	4 mm fixed
W	Ø 0.6 - Ø 0.7 mm

SPECIFICATIONS :

Output	7500 pcs/hr
Power	220V AC, 50 Hz
Dimensions	L-330, W-360, H-400 mm
Weight	35 Kg


Model: ARP 366
Automatic Loose Radial Lead Cutter

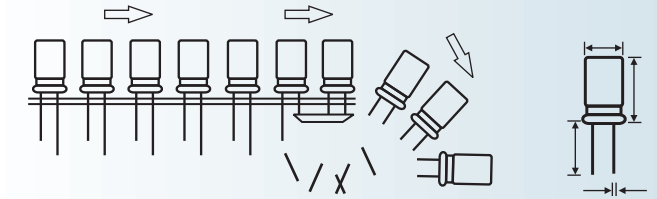

SPECIFICATIONS :

Output	100 - 250 pcs/min
Power	220V AC, 50 Hz
Dimensions	L-1100 W-650 H-1050 mm
Weight	145 Kg

Model: ARP 360
Loose Radial Lead Cutter





A	3 - 25 mm
H	3 - 20 mm
W	Ø 0.4 - Ø 2.0 mm

SPECIFICATIONS :

Power	220V AC, 50 Hz
Dimensions	L-500, W-400, H-450 mm
Weight	30 Kg



Model: UAP 850 R
Automatic De-Taping Machine for Taped Radials

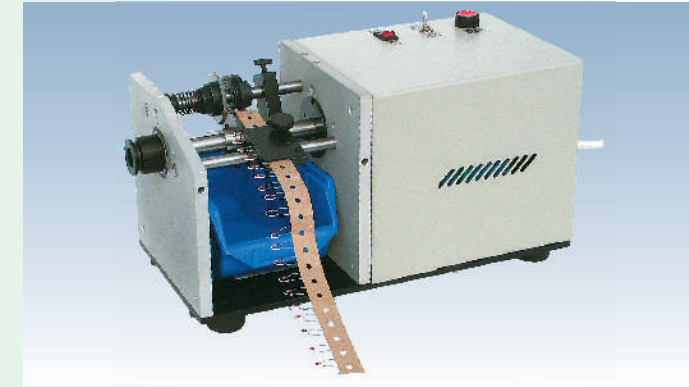

SPECIFICATIONS :

Output	10000 pcs/hr
Power	220V AC, 50 Hz
Dimensions	L-330, W-160, H-155 mm
Weight	10 Kg

Model: MAP 860 R
Manual De-Taping Machine for Taped Radials

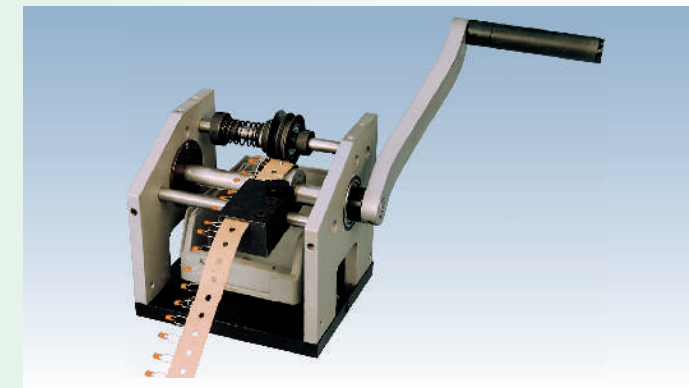

A	12.7 - 15 mm
L	3 - 20 mm
W	Ø 0.4 - Ø 0.8 mm

SPECIFICATIONS :

Output	10000-18000 pcs/hr
Dimensions	L-3300, W-160, H-155 mm
Weight	3 Kg