

We give you the safest and quality products

Get the finest ones



MADHUKAR STEEL CENTRE

Authorized Distributor of Pipe

&


Manufacturer of Tubing

**Stainless Steel | Carbon Steel | Duplex Steel | Highs Nickel Alloys
Ferrous & Non – Ferrous Metals**

Email- export@madhukarsteel.com

Phone- +91-8108105140



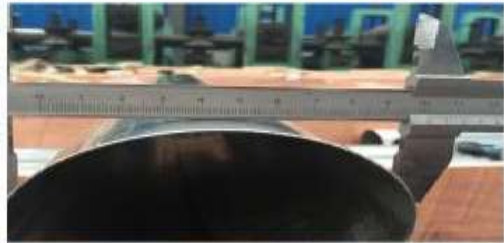

MILL TEST CERTIFICATE

ITEM NO.	GRADE	SIZE	LENGTH	WEIGHT	YIELD STRENGTH	TENSILE STRENGTH	ELONGATION	CHARACTERISTICS
1	304	1.315	6000	1000	205	520	40	304
2	304	1.315	6000	1000	205	520	40	304
3	304	1.315	6000	1000	205	520	40	304
4	304	1.315	6000	1000	205	520	40	304
5	304	1.315	6000	1000	205	520	40	304
6	304	1.315	6000	1000	205	520	40	304
7	304	1.315	6000	1000	205	520	40	304
8	304	1.315	6000	1000	205	520	40	304
9	304	1.315	6000	1000	205	520	40	304
10	304	1.315	6000	1000	205	520	40	304







STAINLESS STEEL PIPE DIMENSION AS PER ASTM & WEIGHT-KG. PER MTR. (ANSI B36.19 & WEIGHT & THICKNESS OF S.S GUAGE PIPES

Nominal Bore		Outside Diameter	Sch-5S		Sch-10S		Sch-20S		Sch-40S		Sch-80S		Sch-160S		Sch-XXS	
mm	INCH	mm	Wt	Weight	Wt	Weight	Wt	Weight	Wt	Weight	Wt	Weight	Wt	Weight	Wt	Weight
			mm	(Kg/mt)	mm	(Kg/mt)	mm	(Kg/mt)	mm	(Kg/mt)	mm	(Kg/mt)	mm	(Kg/mt)	mm	(Kg/mt)
3	1/8	10.3	1.24	0.276	1.24	0.28	1.5	0.33	1.73	0.37	2.41	0.47	-	-	-	-
6	1/4	13.7	1.24	0.390	1.65	0.49	2.00	0.58	2.24	0.631	3.02	0.80	-	-	-	-
10	3/8	17.1	1.24	0.490	1.65	0.63	2.00	0.74	2.31	0.845	3.20	1.10	-	-	-	-
15	1/2	21.3	1.65	0.800	2.11	1.00	2.30	1.07	2.77	1.27	3.75	1.62	4.75	1.94	7.47	2.55
20	3/4	26.7	1.65	1.03	2.11	1.28	2.55	1.52	2.87	1.68	3.91	2.20	5.54	2.89	7.82	3.63
25	1	33.4	1.65	1.30	2.77	2.09	3.00	2.24	3.38	2.50	4.55	3.24	6.35	4.24	9.09	5.45
32	1 1/4	42.2	1.65	1.65	2.77	2.70	3.00	2.90	3.56	3.38	4.85	4.47	6.35	5.61	9.70	7.77
40	1 1/2	48.3	1.65	1.91	2.77	3.11	3.00	3.55	3.68	4.05	5.08	5.41	7.14	7.25	10.16	9.54
50	2	60.3	1.65	2.40	2.77	3.93	3.00	4.24	3.91	5.44	5.54	7.48	8.74	11.1	11.07	13.44
65	2 1/2	73.0	2.11	3.69	3.05	5.26	4.00	6.81	5.16	8.63	7.01	11.4	9.53	14.9	14.2	20.39
80	3	88.9	2.11	4.51	3.05	6.45	4.00	8.37	5.49	11.30	7.62	15.2	11.1	21.3	15.24	27.65
100	4	114.3	2.11	5.84	3.05	8.36	4.50	12.18	6.02	16.07	8.56	22.3	13.49	33.54	17.12	41.03
125	5	141.3	2.77	9.47	3.40	11.57	5.00	16.8	6.55	21.8	9.53	31.97	15.88	49.11	19.05	57.43
150	6	168.3	2.77	11.32	3.40	13.84	6.35	25.4	7.11	28.3	10.97	42.7	18.2	67.56	21.95	79.22
200	8	219.1	2.77	14.79	3.76	19.96	6.35	33.3	8.18	42.6	12.7	64.6	23.0	111.2	22.23	107.8
250	10	273.1	3.40	22.63	4.19	27.78	6.35	41.8	9.27	60.5	12.7	96.0	28.6	172.4	25.40	155.15
300	12	323.9	3.96	31.25	4.57	36.00	6.35	50.0	9.52	73.88	12.7	132.0	33.32	238.76	25.40	186.97
350	14	355.6	3.96	34.36	4.78	41.3	7.92	67.8	11.13	94.59	19.05	158.08	35.71	281.70	-	-
400	16	406.4	4.19	41.56	4.78	47.29	7.92	77.8	12.7	123.30	21.41	203.33	40.46	365.11	-	-
450	18	457.2	4.19	46.80	4.78	53.42	7.92	87.7	14.27	155.80	23.8	254.36	45.71	466.40	-	-
500	20	508.0	4.78	59.25	5.54	68.71	9.53	117	15.09	183.42	26.19	311.2	49.99	564.68	-	-
600	24	609.6	5.54	82.47	6.35	94.45	9.53	141	17.48	255.41	30.96	442.08	59.54	808.22	-	-

		10 SWG	12 SWG	14 SWG	16 SWG	18 SWG	19 SWG
DIMENSION		(3.2 MM)	(2.6 MM)	(2.1 MM)	(1.65 MM)	(1.2 MM)	(1.0 MM)
Size	OD	Weight/MTR	Weight/MTR	Weight/MT R	Weight/MTR	Weight/MTR	Weight/MTR
1/2"	12.7	0.754	0.651	0.552	0.452	0.342	0.290
5/8"	15.875	1.006	0.856	0.718	0.582	0.437	0.369
3/4"	19.05	1.258	1.061	0.883	0.712	0.531	0.448
1"	25.4	1.762	1.470	1.214	0.972	0.720	0.605
1 1/4"	31.75	2.266	1.880	1.544	1.232	0.909	0.763
1 1/2"	38.1	2.770	2.289	1.875	1.492	1.098	0.920
2"	50.8	3.778	3.108	2.537	2.012	1.476	1.235
2 1/2"	63.5	4.786	3.928	3.198	2.531	1.854	1.550
3"	76.2	5.794	4.747	3.860	3.051	2.232	1.865
3 1/2"	88.9	6.802	5.566	4.521	3.571	2.610	2.180
4"	101.6	7.810	6.385	5.183	4.091	2.988	2.495