



OMENT
Packaging Solution

OM ENTERPRISE

Mfg. & Supplier of Coilnails & Coilnailer.




OMENT
Packaging Solution

15 DEGREE SMOOTH COIL NAILS

- ▶ **Material :** Steel wire
- ▶ **Diameter :** 2.5–3.1 mm.
- ▶ **Nail number :** 120–350.
- ▶ **Length :** 38–100 mm.
- ▶ **Size :** 3/4", 7/8", 1", 1-1/4", 1-1/2", 1-3/4",
- ▶ **Collation angle :** 15°.
- ▶ **Point :** diamond
- ▶ **Surface treatment :** painted coated.

CATEGORIES : COIL NAILS, PAINTED COIL NAILS

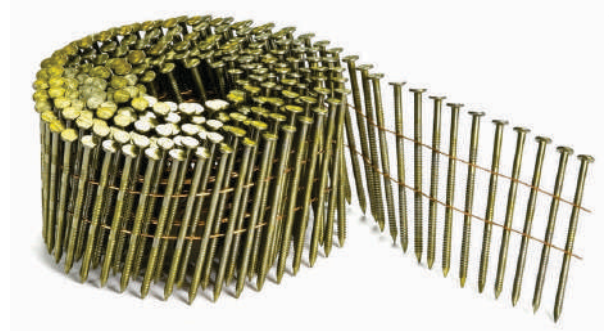

15 DEGREE GALVANIZED COIL NAILS


- ▶ **Material:** Steel wire
- ▶ **Diameter:** 2.5–3.1 mm.
- ▶ **Nail number:** 120–350mm.
- ▶ **Length:** 38–100 mm.
- ▶ **Collation type:** wire.
- ▶ **Collation angle:** 15°.
- ▶ **Shank type:** smooth / screw / ring
- ▶ **Point:** diamond, chisel, blunt.
- ▶ **Surface treatment:** electro – galvanized.

CATEGORIES : COIL NAILS, ELECTRO GALVANIZED COIL NAILS.



15 DEGREE HOT DIPPED GALVANIZED COIL NAILS

- ▶ **Material:** Steel wire
- ▶ **Diameter:** 2.5–3.1 mm.
- ▶ **Nail number:** 120–350.
- ▶ **Length:** 38–100 mm.
- ▶ **Collation type:** wire.
- ▶ **Collation angle:** 15°.
- ▶ **Shank type:** ring.
- ▶ **Point:** diamond, chisel, blunt.
- ▶ **Surface treatment:** hot dip galvanized.

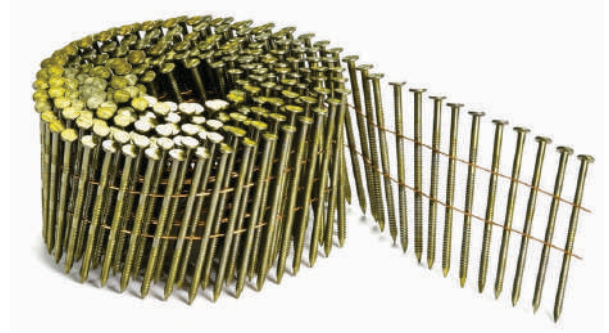

CATEGORIES : COIL NAILS, HOT DIPPED GALVANIZES COIL NAILS

1-3/4" 304 STAINLESS STEEL COIL NAILS RING SHANK


- ▶ **Material:** Stainless steel.
- ▶ **Diameter:** 2.5–3.1 mm.
- ▶ **Nail number:** 120–350.
- ▶ **Length:** 38 –100 mm.
- ▶ **Collation type:** wire.
- ▶ **Collation angle:** 15°.
- ▶ **Shank type:** ring.
- ▶ **Point:** diamond, chisel, blunt.
- ▶ **Surface treatment:** Stainless Steel.



CATEGORIES : COIL NAILS, STAINLESSTELL COIL NAILS

1-1/4" Smooth Collated Roofing Nails

- ▶ **Material:** Steel wire
- ▶ **Diameter:** 0.120" (3.05mm).
- ▶ **Nail number:** 120.
- ▶ **Length:** 32–45 mm.
- ▶ **Collation type:** wire.
- ▶ **Collation angle:** 15°.
- ▶ **Shank type:** smooth shank.
- ▶ **Point:** diamond, chisel, blunt.

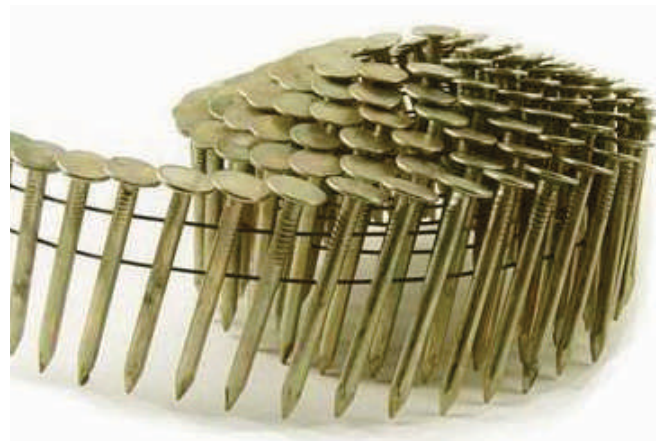

CATEGORIES : COIL ROOFING NAILS

SHANK DIA		LENGTH		HEAD DIA		PCS / Roll
Inch	mm	Inch	mm	Inch	mm	
0.083"	2.1	1-1/4"~2"	32~50	3/16"	4.7	350*40
0.090"	2.3	1-1/2"~2-1/4"	38~57	1/5"	5.8	300*30
0.099"	2.5	1-3/4"~2-1/2"	45~64	1/4"	6.3	300*30
0.113"	2.87	1-1/4"~3"	32~76	1/4"	6.3	250*20
0.120"	3.05	2-3/8"~3-3/4"	60~95	9/32"	7.1	200*20
0.131"	3.33	3"~5"	76~127	9/32"	7.1	200*20

► INTRODUCE

15 Degree Coil Nails is composed of a certain quantity of same shape nails with the same distance, connected by copper-plated steel wire, the connecting wire is in a direction of β angle with respect to the center line of each nail, then rolled in coil or bulks.

Coil nails can save efforts and improve productivity greatly.

Painted Coated 15 Degree Coil Nails is our main product and also our best-selling product. These collated coil nails are compatible with pneumatic wire coil framing nailers. For further information or products details, please feel free to contact us.

► SMOOTH SHANK

Smooth shank coil nails are the most common and are often used for framing and general construction applications. They offer enough holding power for most everyday use.

► SCREW SHANK

A screw shank nail is generally used in hard woods to prevent the wood from splitting while the fastener is being driven. The fastener spins while being driven (like a screw) which creates a tight groove that makes the fastener less likely to back out.

► RING SHANK

Ring Electro Galvanized Coil Nails offer superior holding power over smooth shank nails because the wood fills in the crevasse of the rings and also provide friction to help prevent the nail from backing out over time. A ring shank nail is often used in softer types of wood where splitting is not an issue.

► TOOL

Yellow Coated Pallet Coil Nails will fit in Hitachi, Max, Makita, Paslode, Bostitch and other similar 15-Degree roofing nailers.

► ADVANTAGE

1. Complete specifications
2. Factory direct sales, quality assurance
3. Real materials, trustworthy
4. The 15 Degree Ring Shank Coil Nails are suitable for all standard coil nails at home and abroad

► APPLICATION

Bright Ring Shank Coil Nails offer the ultimate corrosion resistance for use in all high quality siding, roofing, decking and trim boards.

Main application fields include binding of pallet & crate, fencing, garden furniture and external cladding fixation, etc.

You can see some usage scenario in below picture





OMENT

Packaging Solution

☎ **+91 98798 91404**

☎ **+91 96620 25620**

✉ **omenterprise12345@yahoo.com**

🌐 **www.omenterprisescoilnails.com**

📍 **Plot No. : 95.96, Sahitya Industrial Hub, B/s. Om Ind. Park,
Bakrol-Gatrad Road, Bakrol Bujrang, Ahmedabad-382430.**