Easyflex™ Sprinkler Clamps

Specifications :

⇒ Used for free hanging of horizontal pipe lines.
⇒ Used for sprinkler system installation.
⇒ Used for fire extinguishing systems.
⇒ Pipe level can be adjustable vertically after Installation.
⇒ Lips are dimpled at bend for added strength.
⇒ One piece clip guarantees a high permissible load.
⇒ Mounting without any tools.

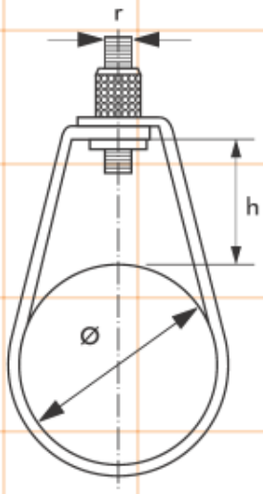

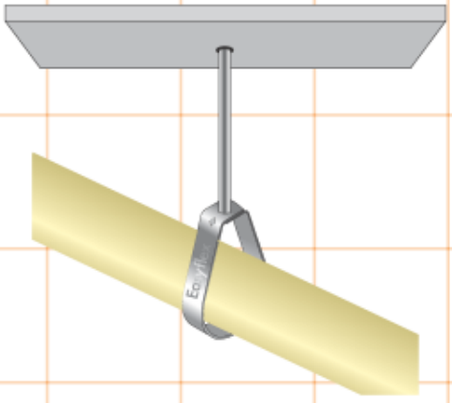

Model No.	Pipe Size (Inches)	Threaded Connection (r) (mm)	Strip Size (mm)	Height (mm)	Height Adjustment (h) (mm)	Safe Working Load (kgs)
EFSC028	3/4"	10	1.5x25	61	28	200
EFSC035	1"	10	1.5x25	68	35	200
EFSC040	1 1/4"	10	1.5x25	75	42	200
EFSC048	1 1/2"	10	1.5x25	81	48	200
EFSC060	2"	10	2.5x25	100	60	200
EFSC075	2 1/2"	10	2.5x25	120	73	450
EFSC090	3"	10	2.5x25	135	89	450
EFSC100	3 1/2"	10	2.5x25	150	105	450
EFSC115	4"	10	2.5x25	165	115	500
EFSC140	5"	12	3x30	195	140	550
EFSC168	6"	12	3x30	230	168	700
EFSC200	8"	12	3x40	290	219	700
EFSC250	10"	12	4x50	315	273	700

⇒ Due to policy of continual improvement, the specifications are subject to change without prior notice.
⇒ Measurements are subject to 5% tolerance.
⇒ To achieve good sound suppression do not over load fitting.